

ULTRALIFT LM LIFTING MAGNET

EASY TO INSTALL

Simply hook to your crane or hoist and you are ready to lift.

EASY TO USE

One man can attach the load, effortlessly, in seconds.

SAFE LIFTING

Safety locking mechanism prevents accidental release of load.

SPACE-SAVING

Access is only required to the load's top face allowing more efficient use of your storage and handling areas.

LOAD CARE

Load surface not marked.

NO RUNNING COSTS

No power required – no additional costs.


HI-PERFORMANCE

'Rare earth' neodymium magnet material provides light weight, high power performance.



Available in 5 sizes

TECHNICAL DATA SWL indicates 3:1 safety factor

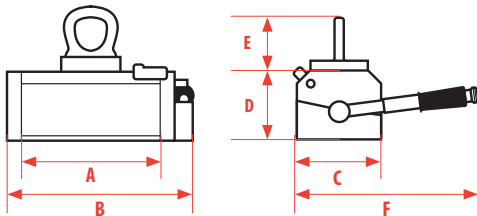

Model No	Self Weight (lbs)	Dimensions (inches)						Flat Section			Round Section		
		A	B	C	D	E	F	SWL (lbs)	Thickness Min (inches)	Length Max (inches)	SWL (lbs)	Diameter Max (inches)	Length Max (inches)
LM0275	9.9	4.3	5.9	3.0	2.4	2.1	5.9	275	0.8	60	110	10	60
LM0550	18.7	6.5	8.3	3.5	2.8	3.0	7.9	550	1.0	60	220	12	60
LM1100	38.5	8.9	11.1	4.2	3.5	4.1	9.6	1100	1.2	80	440	16	80
LM2200	80.3	12.8	15.4	5.4	4.1	4.4	14.4	2200	1.8	120	880	18	120
LM4400	173.8	15.7	19.0	7.3	5.2	6.7	20.7	4400	2.2	120	1760	24	120

OTHER ECLIPSE MAGNETICS LIFTING MAGNETS:

ULTRALIFT PLUS

The ultimate in safety
3 unique safety features, and the patented Safety Shim: pre-test any load to ensure a 3:1 safety factor.



ULTRALIFT TP

Thin sheet lifting specialist, including single sheets from the tops of stacks.



Call **0114 225 0613** to make an enquiry